

ISS187 SWITCHING DIODES


FEATURES

Low forward voltage : $V_{F(3)}=0.92\text{V}(\text{typ.})$

Fast reverse recovery time : $t_{rr}=1.6\text{ns}(\text{typ.})$

MARKING: D3

SOT-23



1. CATHODE
2. N. C
3. ANODE

Maximum Ratings @ $T_A=25^\circ\text{C}$





Para	Symbol	Limits		Unit
Non-Repetitive Peak reverse	V_{RM}	85		V
DC Blocking Voltage	V_R	80		V
Forward Continuous Current	I_{FM}	300		mA
Average Rectified Output Current	I_O	100		mA
Power Dissipation	P_D	150		mW
Junction temperature	T_J	125		$^\circ\text{C}$
Storage temperature range	T_{STG}	-55-125		$^\circ\text{C}$

Electrical Characteristics @ $T_A=25^\circ\text{C}$

Para	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse Breakdown Voltage	$V_{(BR)R}$	80			V	$I_R=100\mu\text{A}$
Forward voltage	V_{F1}		0.61		V	$I_F=1\text{mA}$
	V_{F2}		0.74		V	$I_F=10\text{mA}$
	V_{F3}		0.92	1.2	V	$I_F=100\text{mA}$
Reverse current	I_{R1}			0.1	μA	$V_R=30\text{V}$
	I_{R2}			0.5	μA	$V_R=80\text{V}$
Capacitance between terminals	C_T		2.2	4.0	pF	$V_R=0, f=1\text{MHz}$
Reverse recovery time	t_{rr}		1.6	4.0	ns	$I_F=I_R=10\text{mA}, I_{rr}=0.1 \times I_R$

Typical Characteristics

ISS187

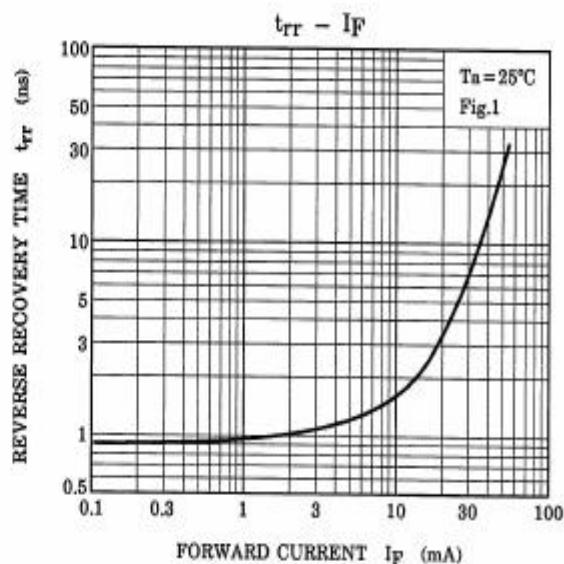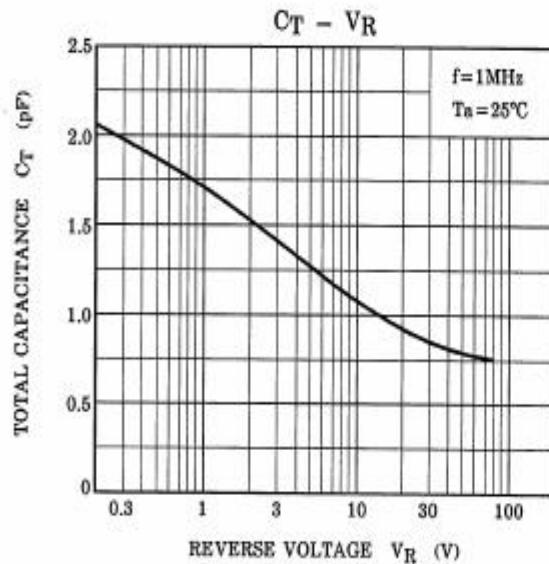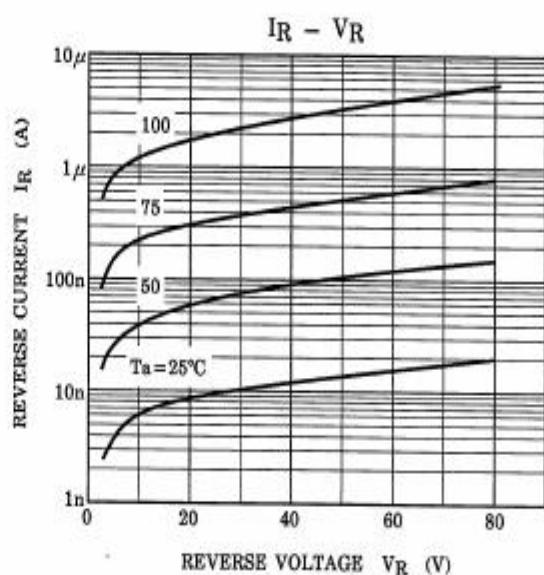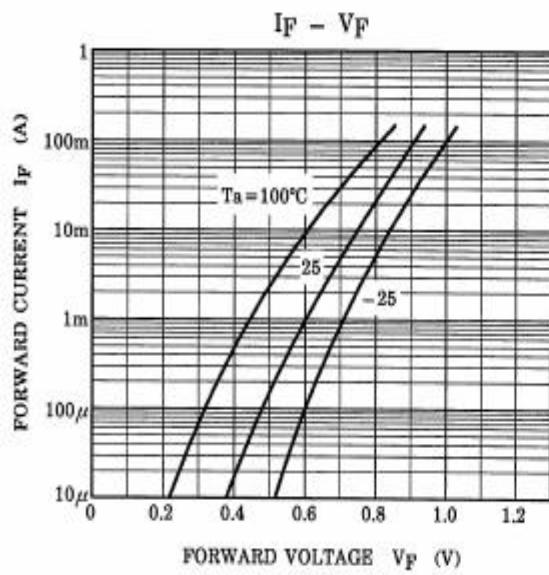

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

